



FirePro® Intumescent Putty Pads


Resists the spread of fire through plasterboard partitions

Intumescent Putty Pads are manufactured from a red non-setting, flexible silicone based intumescent polymer.

The intumescent properties activate as temperatures reach 200°C, resisting the passage of fire and smoke.

- Available for single & double sockets
- Up to 2 hours* fire resistance
- Reduces noise transfer
- Pre-cut for simple installation
- Maintenance free
- Tested for air tightness, providing an additional smoke and acoustic seal

**Subject to the application*

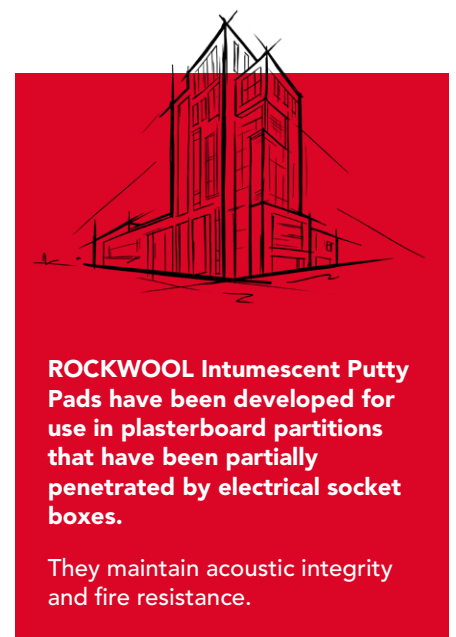

FirePro Intumescent Putty Pads



APPLICATIONS

Intumescent Putty Pads are designed for (but not limited to) effecting a fire and acoustic seal around plastic or metal electrical socket boxes. Using the putty pads removes the need to install time-consuming baffle boxes.

Under fire conditions the intumescent pad expands to fill the void left by the burnt out electrical socket box, resisting the spread of fire through the plasterboard wall. The intumescent putty can also be used for upgrading the acoustic performance of partitions where electrical sockets boxes have penetrated the wall, reducing room-to-room noise transfer.

FirePro Intumescent Putty Pads

PERFORMANCE

Fire performance

Tested to BS 476 Part 20:1987/EN1366-3, Acoustic Intumescent Putty Pads offer up to 2 hour* fire resistance.

**Subject to the application*

Intumescent Putty Pads have been subjected to a European Technical Assessment on the basis of EAD 350454-00-1104.

Use the links below to access further information on fire performance:

[ETA 21-0851 >](#)

[Certificate of constancy of performance 2531-CPR-CXO10350 >](#)

[Fire Stopping Standard Details Guide >](#)

Acoustic performance

Measurement of airborne sound insulation was made in accordance with BS EN ISO 140-3:1995. Single number quantities were calculated in accordance with BS EN ISO 717-1:1997.

Intumescent Putty Pads (Internal socket) offer an airborne sound insulation rating of up to $RW(C;Ctr) = 67 (-2; -7) \text{ dB}^*$.

Tests were conducted by BRE Acoustics who hold UKAS accreditation for the measurement of sound insulation in the field and the laboratory. The measurements were conducted using the procedures accredited by UKAS.

**Applicable only for ROCKWOOL FirePro Putty Pads in socket boxes*

PRODUCT INFORMATION

Property	Description
Suitable socket size	Single & double gang
Suitable socket type	Internally & externally mounted
Activation temperature	200°C
Application temperature	0°C to 40°C
Acoustic performance	Up to 67 dB
Shelf life	Up to 24 months
Fire resistance	Up to 2 hours*

**Subject to the application*

FirePro Intumescent Putty Pads

INSTALLATION

1. Remove the socket plate.
2. To ensure a high-quality seal, ensure the socket box is clean, dry and free from any dirt and dust.
3. Remove the protective paper from one side of the pad and align the pad so that it fits centrally over the switchbox. (can be installed to either the inside or the outside of the socket, depending on the fitting method / type of socket).
4. Firmly press and mould the pre-formed putty pad into the back of the box and around the cables ensuring the pad perimeter is sufficiently bonded.
5. Remove the remaining protective paper and trim off any excess material to leave a neat finish.
6. Replace and secure the socket plate.



Figure 1

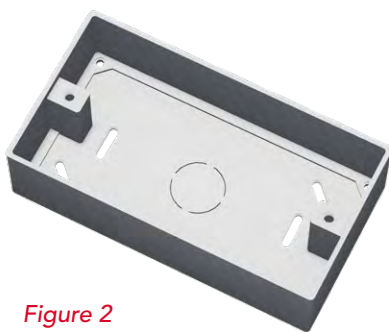


Figure 2



Figure 3

SPECIFICATION CLAUSES

FirePro Intumescent Putty Pads are associated with the following NBS Clause:

P12 Fire stopping systems

350 Intumescent Putty

For more information visit rockwool.com/uk

Pencoed, Bridgend CF35 6NY
Tel: (+44) 1656 862 621 • technical.solutions@rockwool.com

FirePro Intumescent Putty Pads

BUILDING SAFETY AND PRODUCT USE

LEGAL NOTICES

General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to:
marketcom@rockwool.com

Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor® Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2023.
All rights reserved.

Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to:
marketcom@rockwool.com

HEALTH & SAFETY

A Material Safety Data Sheet is available and can be downloaded from www.rockwool.com/uk to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH)